


CO.ME.T OFFICINE S.p.A.

Sede Legale ed Amministrativa - Show Room - Stabilimento di produzione:
Via Castelfranco, 46 - Località Tivoli - 40017 San Giovanni in Persiceto (BO)
Telefono +39.051.6878711 - Fax +39.051.799902
Email: info@officinecomet.com - Website: www.officinecomet.com





MODELLO / MODEL / MODELE:	CODICE / CODE / REF.:	
NEW EUROSFILO 19/2/7(8.5) HQ IN SAGOMA	31FT00003	
VEICOLO / VEHICLE / VEHICULE:	PTT / GVW / PTC:	PASSO / WHEELBASE / EMPATT:
IVECO DAILY 35S	3500 kg	3450 mm

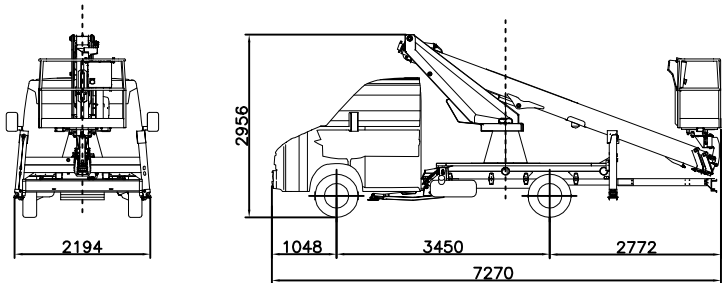

(*) Kit "A" Autocarro non fornito

CODICI MONTAGGIO CORRISPONDENTI:
318100001
318100006
E6 318100044
E6 318100046
E6 318100052(*)
E6D 318100063(*)
E6D 318100067
E6E 318100071(*)
E6E 318100073
E6E 318100076
E6E 318100079
E6E 318100083
E6E 318100087

Area lavoro navicella
Working area basket
Zone de travail nacelle

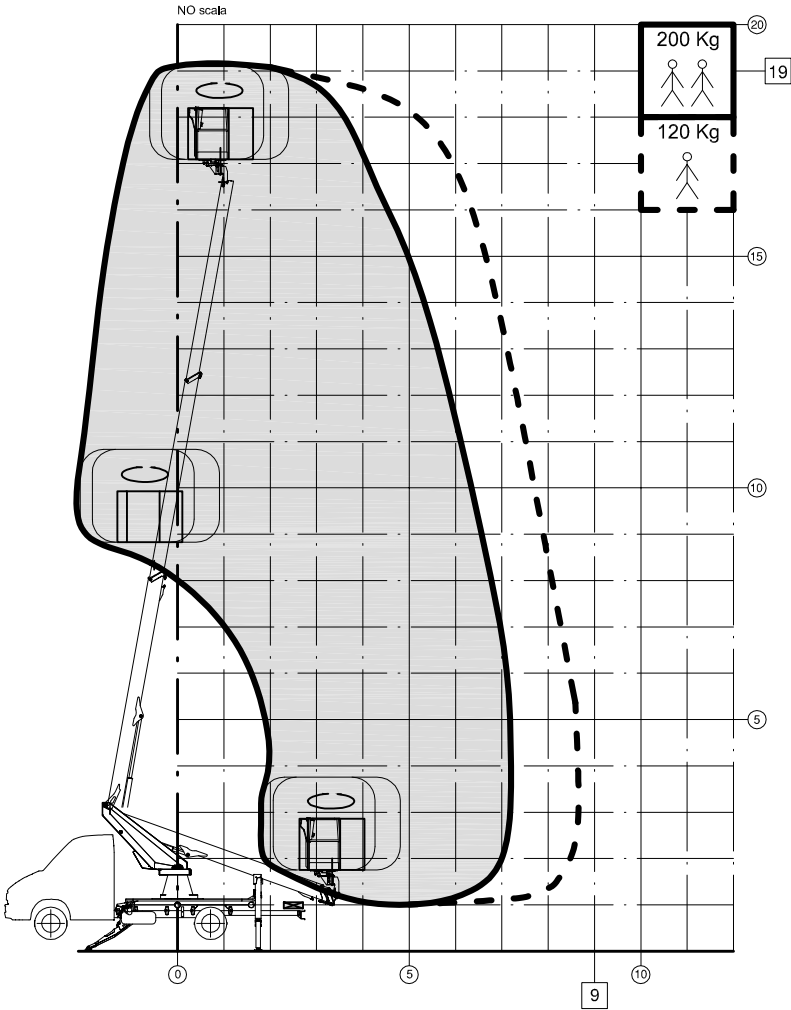

NOTA: con Navicella in Vetroresina sbraccio ridotto di 0,75m
NOTE: with fiberglass basket reduced max. lateral outreach off 0,75m
NOTE: avec nacelle en fibre de verre déport latéral réduite de 0,75m

NOTA: con 80Kg di portata in navicella sbraccio massimo 9m
NOTE: with 80Kg capacity in the basket max. lateral outreach 9m
NOTE: avec 80Kg capacité dans le panier max. déport latéral 9m

CARATTERISTICHE TECNICHE TECHNICAL FEATURES DONNES TECHNIQUES	
Altezza di lavoro Working height Hauteur de travail	19m
Portata Working load Charge utile	200 (120) Kg
Raggio max. di lavoro Working range Etendu latérale max.	7 (8.5) m
Peso Total weight Poids	3350 Kg
Articolazione braccio superiore Upper boom articulation Articulation bras supérieur	-23° +80°
Articolazione braccio inferiore Lower boom articulation Articulation bras inférieur	-
Rotazione torretta Turret rotation Rotation de la tourelle	360°
Ciclo completo di manovra Mnoeuving complete cycle Cycle complet de manoeuvre	5.30 min
Isolamento braccio superiore Upper arm isolation Isolement du bras supérieur	-
Isolamento braccio inferiore Lower arm isolation Isolement du bras inférieur	-
Pressione max circuito Max circuit pressure Pression max du circuit	250 bar - 25 Mpa
Portata min/max pompa Min / max pump flow Débit min / max de la pompe	12 - 16 l/min
Tensione e max. Assorbimento Voltage and max. Absorption Tension at Absorption max.	12 V - 9 A
Conforme in conformity with en conformité avec	CE

CO.ME.T OFFICINE S.p.A. si riservano il diritto di apportare modifiche in sede esecutiva senza preavviso
CO.ME.T OFFICINE S.p.A. reserves the right to make any technical modification without notice
CO.ME.T OFFICINE S.p.A. se réservent le droit d'apporter des modifications techniques sans préavis